


# Installation Instructions

for the SMART Tank Monitoring System.


Materials needed to install:

- 1 Telephone Cord
- 1 SMART Display Module
- 1 Power Adapter

Choose a location for your SMART display Module within 6 feet of a telephone jack and a standard electrical outlet not controlled by a wall switch.

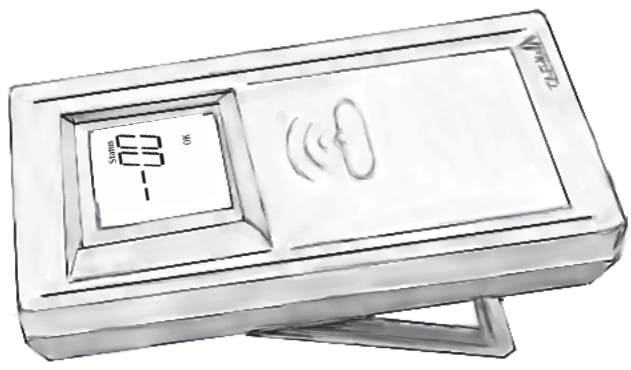

SMART Display (Front)

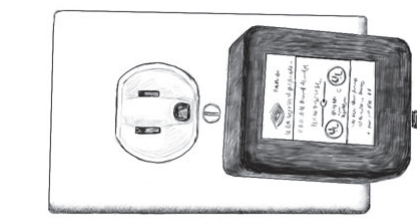


Standard Electrical Outlet

### STEP 2:

Connect the power cord.

Use only the power cord supplied with this product.


The SMART display can be set on a countertop using the built-in stand, or it can be mounted on the wall using the mounting keyholes. After installation it will display a "00" which means the self test and phone test were successful. The SMART display will show data within 72 hours.

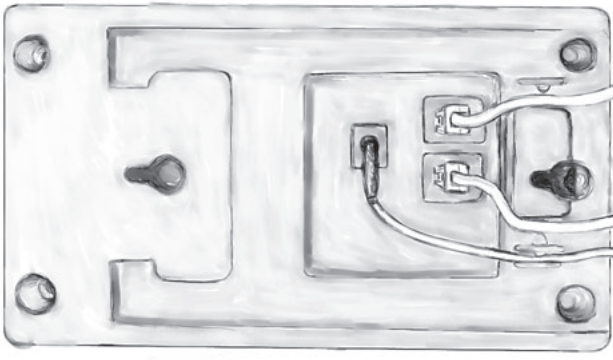

SMART Display Module (Back)

### STEP 1:

Connect the telephone line cord.

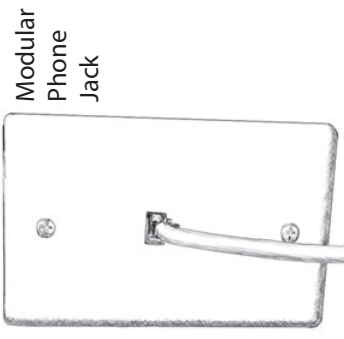

Modular Phone Jack



### STEP 3:

Connect the telephone. (Optional)